



Product information

Cross-section view

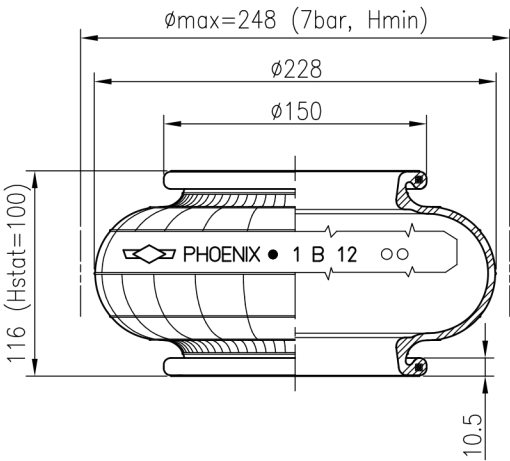

Bead ring

Bead rings are not included.

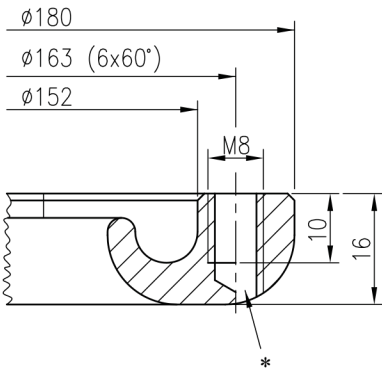


*Continuous thread is allowed, if the screw doesn't protrude the bead-ring.

Technical data

Loading capacity max.	17.30 kN
Max. lifting pressure	8.0 bar
Diameter max.	248 mm
Required space \varnothing	270 mm
Height max.	150 mm
Height min.	50 mm
Weight	0.74 kg
Force to collapse to min. height	

DYNAMIC DATA

Static height 100 mm

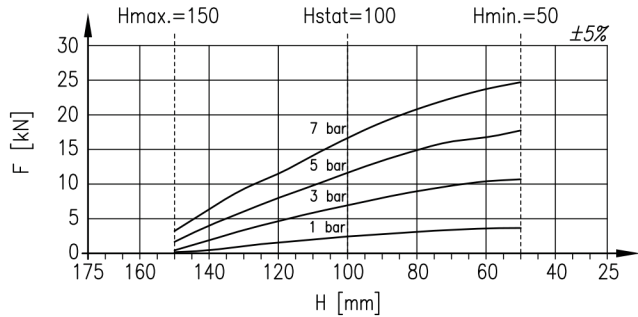

PRESSURE bar	FORCE kN	SPRING RATE N/cm	NATURAL FREQU. Hz
1	2.2	977	3.28
3	7.0	2296	2.84
5	12.0	3667	2.75
7	17.3	5026	2.68